


# Operation

## Using the Tank Controls for Slush and Juice Modes

The machine has control panel on the side that allows you to individually control each tank as required. There are two basic modes of operation:


- **Juice Mode** – Cools the drink solution, however, not to the point of making ice.
- **Slush Mode** – Cools the drink solution to the point of being ice.

For each tank, there is a switch panel. When a switch is placed in the ON position, the red lamp on the switch illuminates. For each set of switches, the tank that they apply to is labelled next to the switches. The configuration of switches determine the tank function, as follows:

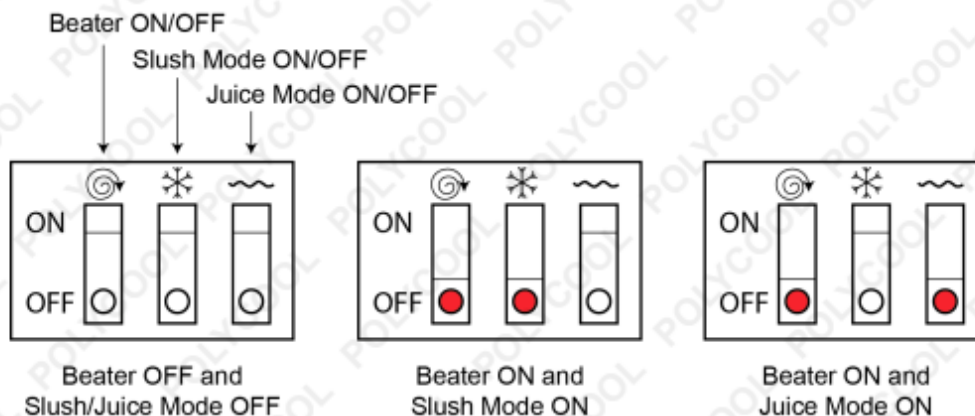

Always place the beater switch in the ON position for either juice or slush mode. • For **Slush mode**, place the slush mode switch in the ON position and the juice mode switch in the OFF position. • For **Juice mode**, place the slush mode switch in the OFF position and the juice mode switch in the ON position.

The machine compressor (cooling unit) and tank cover lights for all tanks are controlled by a single set of “master” switches at the bottom of the control panel. When a switch is placed in the ON position, the red lamp on the switch illuminates.

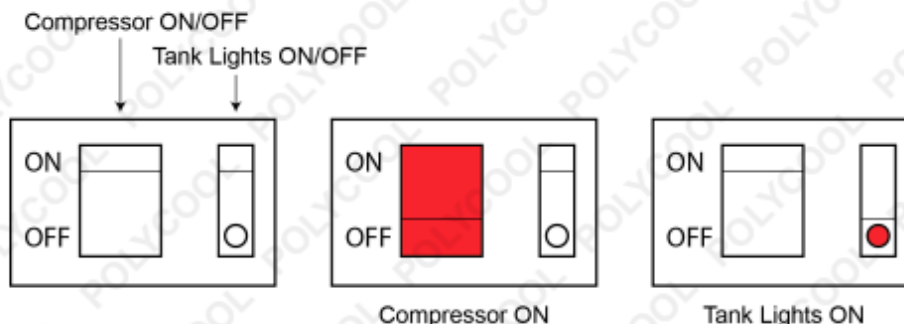

## Filling the Tanks



Ensure that the drink solution is less than 35°C (95°F) when filling the tanks otherwise machine damage may result. • Always mix the drink solution so that is a minimum of **25%** sugar (ratio approximately **4** parts water to 1 part sugar), otherwise the consistency of slush ice will be incorrect and damage to machine may result. • Never allow the level of the drink solution to remain below the minimum level or above the maximum level as machine damage may result. **Failure to carry out the procedures correctly may result in making the product warranty void.**

1. Thoroughly mix the drink solution according to its instruction. Mix in a container that is clean and suitable for handling food and drink for human consumption.
2. Switch OFF the slush or juice mode switch and beater for the tank before refilling. If you are filling all tanks, turn OFF the compressor using the "master" switch.
3. Switch OFF the tank lights.
4. Unplug and remove the tank cover.
5. Carefully pour the mixture into the tank. Do not fill to less than the "MIN LEVEL" indicator or over the "MAX LEVEL" indicators on the front of the tank.
6. When finished filling, place the tank cover in position and re-connect the cable. Reconnect the machine to the electricity supply if previously unplugged. Switch ON the slush or juice mode switch and beater for the tank or at the "master" switch. Switch ON the tank lights.

